



## WARDFLEX® Female Outdoor Termination Fitting

Ward Manufacturing, LLC.  
117 Gulick Street  
Blossburg, PA 16912  
Tel. (800)248-1027  
www.wardmfg.com

### Description:

The 3/8" thru 1-1/4" WARDFLEX® tubing is terminated using the patented, STEPSAVER double seal fitting. The 1-1/2" and 2" tubing utilize the WARDFLEX® traditional gasketed fitting design. Only fittings designed and listed for use with the WARDFLEX® and WARDFLEX® MAX CSST Piping Systems shall be used when connecting to the flexible piping.

### Features:



- Provides fixed point termination on wall or floor
- One corrugation crush seal
- Reusable
- 3/8" through 1-1/4" patented STEPSAVER fittings
  - Primary metal to metal seal
  - Secondary gasket seal

### Components:

- Female NPT Body
- Retainer Ring
- Termination Nut
- Gasket
- Termination Fitting Base Plate w/ 2 screws
- Outdoor fittings are supplied with o-rings

### Listings:

- CSA: File# 112940\_0\_000
- IAPMO: File# 3353
- ICC: Report# ESR-1879

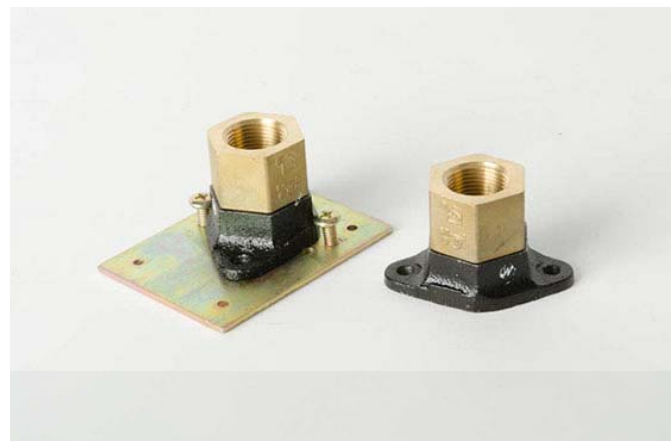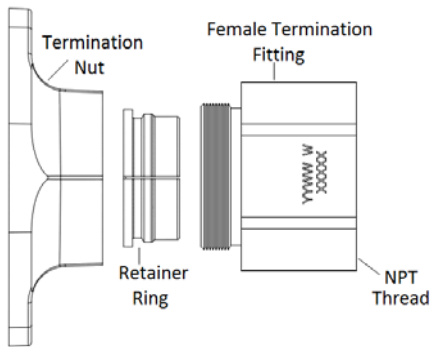

### Technical Data:

#### General

Certified Operating Pressure	25 psi
------------------------------	--------

#### Material

Body & Retainer Ring	Brass
Termination Nut	Malleable Iron
Gasket	Composite Fiber
Base Plate	Steel

#### Dimensions

Price Sheet Item #	CSST Size	NPT Size	Nut Hex	Fitting Hex	Width of Termination Nut	Assembled Length	Maximum Tightening Torque (ft/lbs)	Approximate Weight (lbs)
290	3/8"	1/2"	1.10"	1-1/16"	2.60"	1.636"	50	0.79
291	1/2"	1/2"	1.22"	1-1/16"	2.60"	1.674"	50	0.80
292	3/4"	3/4"	1.54"	1-1/2"	3.00"	1.850"	120	1.17
294	1"	1"	1.77"	1-3/4"	3.46"	1.972"	160	1.50

Revision Date  
June 16, 2015  
Rev. 02